

Tri Proof **CEILING/WALL** Round & Oval IP66
Tri Proof **PLAFOND /MURAL** Rond & Ovale IP66

TSG



15W & 24W


- Tri Proof IP66
- High Efficacy luminaire 110 Lm/W
- Easy installation
- 70% Energy Saving
- Long lifetime 50000h



Round	Oval	Lumen
15W	15W	1650 Lm
24W	24W	2640 Lm
EFF110		IP66

Round 15/24

TRI PROOF CEILING LIGHTS & WALL LIGHTS

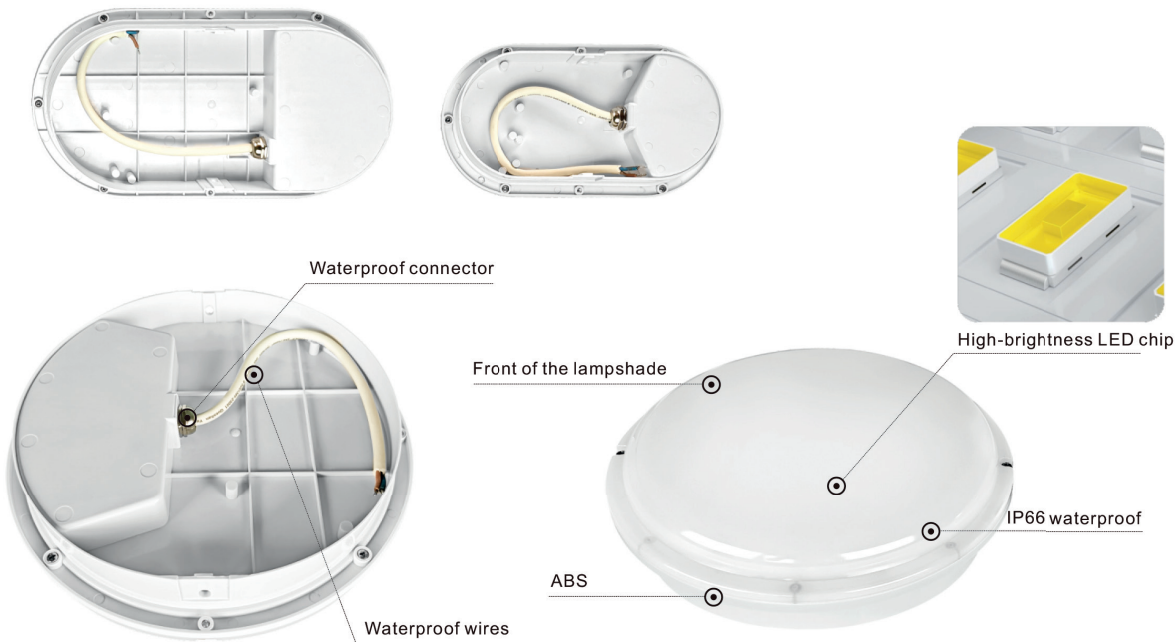

PROFESSIONAL APPLICATIONS

TSG25 Round IP66

Page 1/5



Tri Proof CEILING/WALL Round & Oval IP66

Tri Proof PLAFOND /MURAL Rond & Ovale IP66

TSG

Technical Specifications

Données techniques

ROUND ROND



Input Voltage	Max. Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.075A	DC270V	0.055A	15W	> 0.5
LED Type	LED Q'ty	CRI			
SMD2835	60 PCS	> 80Ra			
Life Time	Certifications	IP Code	Luminares Class	Product Dimension	N.W.
50.000 Hours	CE, Rohs	IP66	Class II	Ø165*H58mm	0.23Kg
Operating Temperature	Humidity Operating	Driver / Transfo	Dimming	Packing Dimension	G.W.
-20°C to +50°C	10-80% RH	Sharplumi	no	L170*W170*H65mm	0.28Kg
Outer carton package	50*1 layer = 50PCS/carton, L870*W345*H360mm, GW 14.8Kg				

LUMINOUS FLUX - FLUX LUMINEUX

CCT	3000K	4000K	5000K
Luminous Efficiency	100 Lm/W	110 Lm/W	110 Lm/W
Luminous Flux	1500 Lm	1650 Lm	1650 Lm
Beam Angle	120°		



15 WATT
IP66
Ø165mm

Input Voltage	Max. Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.155A	DC270V	0.088A	24W	> 0.5
LED Type	LED Q'ty	CRI			
SMD2835	90 PCS	> 80Ra			
Life Time	Certifications	IP Code	Luminares Class	Product Dimension	N.W.
50.000 Hours	CE, Rohs	IP66	Class II	Ø220*H60mm	0.38Kg
Operating Temperature	Humidity Operating	Driver / Transfo	Dimming	Packing Dimension	G.W.
-20°C to +50°C	10-80% RH	Sharplumi	no	L228*W228*H68mm	0.45Kg
Outer carton package	40*1 layer = 40PCS/carton, L705*W475*H475mm, GW 18.8Kg				

LUMINOUS FLUX - FLUX LUMINEUX

CCT	3000K	4000K	5000K
Luminous Efficiency	100 Lm/W	110 Lm/W	110 Lm/W
Luminous Flux	2400 Lm	2640 Lm	2640 Lm
Beam Angle	120°		




24 WATT
IP66
Ø220mm

PROFESSIONAL APPLICATIONS

TSG25 Round IP66

Page 2/5

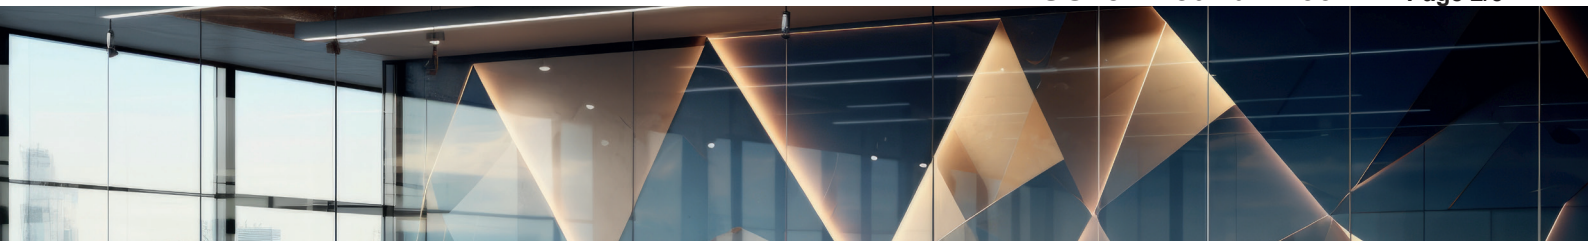

Tri Proof CEILING/WALL Round & Oval IP66
Tri Proof PLAFOND /MURAL Rond & Ovale IP66

TSG

Technical Specifications
Données techniques

OVAL OVALE



Input Voltage	Max. Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.075A	DC270V	0.055A	15W	> 0.5
LED Type	LED Q'ty	CRI			
SMD2835	60 PCS	> 80Ra			
Life Time	Certifications	IP Code	Luminaire Class	Product Dimension	N.W.
50.000 Hours	CE, Rohs	IP66	Class II	L212*W113*H65mm	0.25Kg
Operating Temperature	Humidity Operating	Driver / Transfo	Dimming	Packing Dimension	G.W.
-20°C to +50°C	10-80% RH	Sharplumi	no	L220*W120*H72mm	0.30Kg
Outer carton package	50*1 layer = 50PCS/carton, L620*W380*H460mm, GW 15.8Kg				

LUMINOUS FLUX - FLUX LUMINEUX

CCT	3000K	4000K	5000K
Luminous Efficiency	100 Lm/W	110 Lm/W	110 Lm/W
Luminous Flux	1500 Lm	1650 Lm	1650 Lm
Beam Angle	120°		

15 WATT - IP66



Input Voltage	Max. Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.155A	DC270V	0.088A	24W	> 0.5
LED Type	LED Q'ty	CRI			
SMD2835	90 PCS	> 80Ra			
Life Time	Certifications	IP Code	Luminaire Class	Product Dimension	N.W.
50.000 Hours	CE, Rohs	IP66	Class II	L272*W145*H65mm	0.36Kg
Operating Temperature	Humidity Operating	Driver / Transfo	Dimming	Packing Dimension	G.W.
-20°C to +50°C	10-80% RH	Sharplumi	no	L280*W152*H73mm	0.43Kg
Outer carton package	40*1 layer = 40PCS/carton, L630*W385*H580mm, GW 18Kg				

LUMINOUS FLUX - FLUX LUMINEUX

CCT	3000K	4000K	5000K
Luminous Efficiency	100 Lm/W	110 Lm/W	110 Lm/W
Luminous Flux	2400 Lm	2640 Lm	2640 Lm
Beam Angle	120°		

24 WATT - IP66



PROFESSIONAL APPLICATIONS

TSG25 Round IP66



Tri Proof CEILING/WALL Round & Oval IP66

Tri Proof PLAFOND /MURAL Rond & Ovale IP66

TSG



Kelvin range / Kelvin disponible

3000K Warmwhite / Blanc chaud

4000K Neutralwhite / Blanc neutre

5000K Coldwhite / Blanc froid



Packaging / Emballage

15 Watt

Weight - Poids 1 pce | 0.23 Kg

50 pcs / box - carton | 14 Kg


24 Watt

Weight - Poids 1 pce | 0.38 Kg

40 pcs / box - carton | 18 Kg



Product Images / Photos supplémentaires

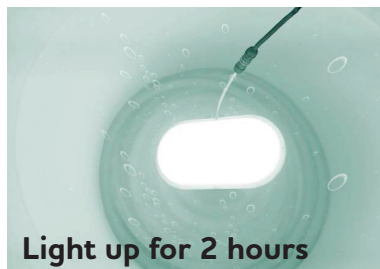

Light up for 2 hours

Inmersion 2 heures

Even in extreme humidity and harsh environments, the lamp maintains stable performance after a two-hour water immersion test, demonstrating outstanding reliability.



Product Code(s) / Codes d'articles

ROUND

TSG250130 LED Walllight ROUND Ø165x58mm 15W 3000K 1500Lm 230v IP66 - Opbouw
TSG250140 LED Walllight ROUND Ø165x58mm 15W 4000K 1650Lm 230v IP66 - Opbouw

TSG250230 LED Walllight ROUND Ø220x60mm 24W 3000K 2400Lm 230v IP66 - Opbouw
TSG250240 LED Walllight ROUND Ø220x60mm 24W 4000K 2640Lm 230v IP66 - Opbouw

OVAAL

TSG250330 LED Walllight OVAAL L212xH113mm 15W 3000K 1500Lm 230v IP66 - Opbouw
TSG250340 LED Walllight OVAAL L212xH113mm 15W 4000K 1650Lm 230v IP66 - Opbouw

TSG250430 LED Walllight OVAAL L272xH145mm 24W 3000K 2400Lm 230v IP66 - Opbouw
TSG250440 LED Walllight OVAAL L272xH145mm 24W 4000K 2640Lm 230v IP66 - Opbouw

SENSOR / DETECTEUR DE MOUVEMENT

TSG250840 LED Walllight OVAAL Ø212x113x65mm 15W 4000K 1650Lm 230v IP66 SENSOR



PROFESSIONAL APPLICATIONS

TSG25 Round IP66


Page 4/5





Tri Proof CEILING/WALL Round & Oval IP66
Tri Proof PLAFOND /MURAL Rond & Ovale IP66



Dimensions / Dimensions

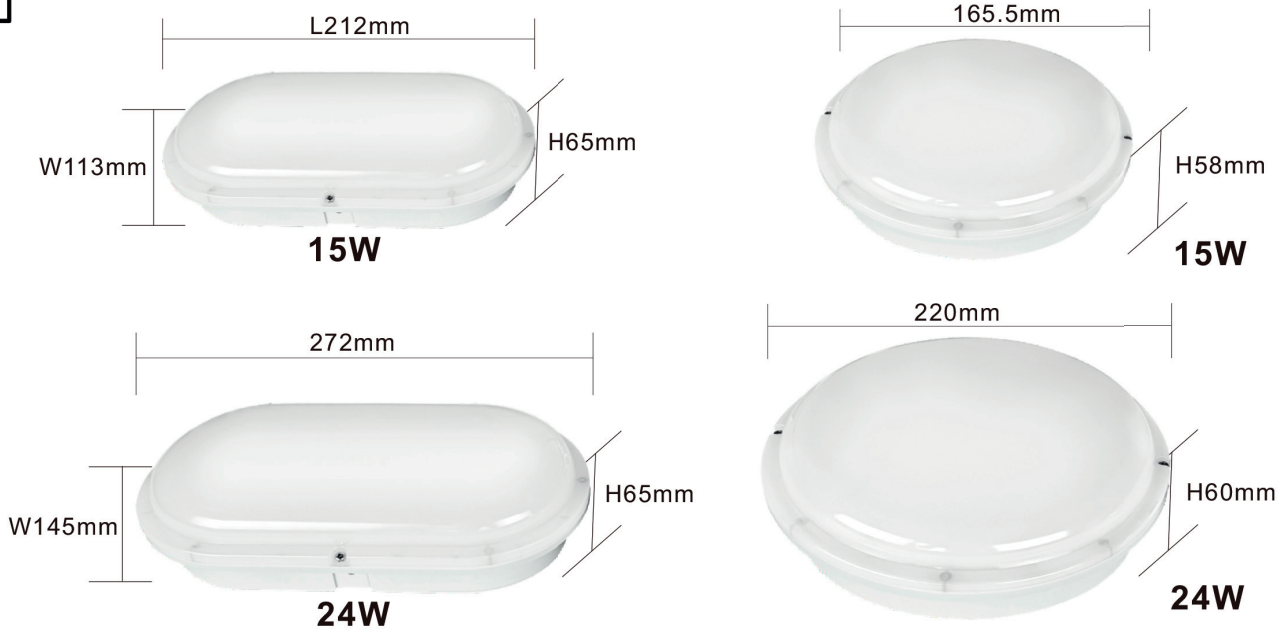

Item n°	Power	Dimensions (LxWxH)
SR05-15W-OV210	15W	L212 x W113 x H54mm
SR05-15W-OV270	24W	L272 x W113 x H54mm
SR05-15W-OV160	15W	Ø165 x H58mm
SR05-15W-RN220	24W	Ø220 x H60mm

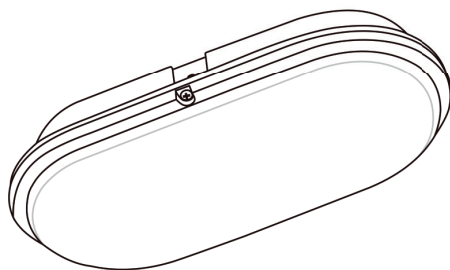

PROFESSIONAL APPLICATIONS

TSG25 Round IP66

