

Tri Proof ECO SlimLine36 18W-32W-45W
Tri Proof ECO SlimLin36 18W-32W-45W

TSG



- Tri Proof IP65 Compact Design
- High Efficacy luminaire
- Easy installation
- S Series injection item

eco-budget

**COMPACT
DESIGN**

60cm 2520 Lm
120cm 4480 Lm
150cm 6300 Lm



EFF140
IP65

60cm - 120cm - 150cm



Technical Specifications
Données techniques

18 Watt



Input Voltage	Max. Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	1.08A	DC120V	0.15A	18W	> 0.90
LED Type	LED Q'ty	CRI			
SMD2835	80 PCS	> 80Ra			
Life Time	Certifications	IP Code	Luminaire Class	Product Dimension	N.W.
30.000 Hours	CE, Rohs	IP65	Class II	L600*W36*H48mm	0.255Kg
Operating Temperature	Humidity Operating	Driver / Transfo	Dimming	Packing Dimension	G.W.
-20°C to +50°C	10-80% RH	Sharplumi	Not dimmable	L690*W51*H39mm	0.280Kg
Outer carton package	40*1 layer = 40PCS/carton, L705*W275*H335mm, GW 13.45 Kg				

**LUMINOUS FLUX
FLUX LUMINEUX**

18 Watt

CCT	3000K	4000K	6000K
Luminous Efficiency	130 Lm/W	140 Lm/W	140 Lm/W
Luminous Flux	2340 Lm ±10%	2520 Lm ±10%	2520 Lm ±10%
Beam Angle	120°		

RESIDENTIAL APPLICATIONS



Tri Proof ECO SlimLine36 18W-32W-45W

Tri Proof ECO SlimLin36 18W-32W-45W

TSG

Technical Specifications
Données techniques

32 Watt



Input Voltage	Max. Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.14A	DC162V	0.2A	32W	> 0.95
LED Type	LED Q'ty	CRI			
SMD2835	216 PCS	> 80Ra			
Life Time	Certifications	IP Code	Luminaire Class	Product Dimension	N.W.
30.000 Hours	CE, Rohs	IP65	Class II	L1200*W36*H48mm	0.400Kg
Operating Temperature	Humidity Operating	Driver / Transfo	Dimming	Packing Dimension	G.W.
-20°C to +50°C	10-80% RH	Sharplumi	Not dimmable	L1290*W51*H39mm	0.430Kg
Outer carton package	25*1 layer = 25PCS/carton, L1305*W275*H215mm, GW 13.7 Kg				

LUMINOUS FLUX
FLUX LUMINEUX

32 Watt
120 cm

CCT	3000K	4000K	6000K
Luminous Efficiency	130 Lm/W	140 Lm/W	140 Lm/W
Luminous Flux	4160 Lm ±10%	4480 Lm ±10%	4480 Lm ±10%
Beam Angle	120°		

Technical Specifications
Données techniques

45 Watt



Input Voltage	Max. Current	Operating Voltage	Constant Current	Power Consumption	Power Factor
AC200-240V	0.19A	DC162V	0.28A	45W	> 0.95
LED Type	LED Q'ty	CRI			
SMD2835	270 PCS	> 80Ra			
Life Time	Certifications	IP Code	Luminaire Class	Product Dimension	N.W.
30.000 Hours	CE, Rohs	IP65	Class II	L1500*W36*H48mm	0.500Kg
Operating Temperature	Humidity Operating	Driver / Transfo	Dimming	Packing Dimension	G.W.
-20°C to +50°C	10-80% RH	Sharplumi	Not dimmable	L1590*W51*H39mm	0.550Kg
Outer carton package	25*1 layer = 25PCS/carton, L1605*W275*H215mm, GW 16.65 Kg				

LUMINOUS FLUX
FLUX LUMINEUX

45 Watt
150 cm

CCT	3000K	4000K	6000K
Luminous Efficiency	130 Lm/W	140 Lm/W	140 Lm/W
Luminous Flux	5850 Lm ±10%	6300 Lm ±10%	6300 Lm ±10%
Beam Angle	120°		

RESIDENTIAL APPLICATIONS



Tri Proof ECO SlimLine36 18W-32W-45W

Tri Proof ECO SlimLin36 18W-32W-45W

TSG



Kelvin range / Kelvin disponible

3000K Warmwhite / Blanc chaud

4000K Neutralwhite / Blanc neutre

5000K Coldwhite / Blanc froid



Packaging / Emballage

18 Watt

Weight - Poids 1 pce | 0.255 Kg

40 pcs / box - carton | 13.45 Kg

32 Watt

Weight - Poids 1 pce | 0.400 Kg

25 pcs / box - carton | 13.7 Kg

45 Watt

Weight - Poids 1 pce | 0.500 Kg


25 pcs / box - carton | 16.65 Kg



Product Images / Photos supplémentaires



If In Series



Model	Connection	Qty Max(pcs)
SR05-18W-630		60
SR05-32W-1230		30
SR05-45W-1530		20

Model	Power	Fixing Hole Centre
SR05-18W-630 INJECTION ITEM	18W	470mm
SR05-32W-1230 INJECTION ITEM	32W	1020mm
SR05-45W-1530 INJECTION ITEM	45W	1320mm



Product Code(s) / Codes d'articles

TSG290130	LED TriProof SLIMLINE36 60CM 18W 3000K 2340Lm ECO 230v IP65 /40
TSG290140	LED TriProof SLIMLINE36 60CM 18W 4000K 2520Lm ECO 230v IP65
TSG290150	LED TriProof SLIMLINE36 60CM 18W 6000K 2520Lm ECO 230v IP65
TSG290230	LED TriProof SLIMLINE36 120CM 32W 3000K 4160Lm ECO 230v IP65 /25
TSG290240	LED TriProof SLIMLINE36 120CM 32W 4000K 4480Lm ECO 230v IP65
TSG290260	LED TriProof SLIMLINE36 120CM 32W 6000K 4480Lm ECO 230v IP65
TSG290330	LED TriProof SLIMLINE36 150CM 45W 3000K 6000Lm ECO 230v IP65 /25
TSG290340	LED TriProof SLIMLINE36 150CM 45W 4000K 6300Lm ECO 230v IP65
TSG290360	LED TriProof SLIMLINE36 150CM 45W 6000K 6300Lm ECO 230v IP65







Tri Proof ECO SlimLine36 18W-32W-45W
Tri Proof ECO SlimLin36 18W-32W-45W

TSG



Product Images / Photos

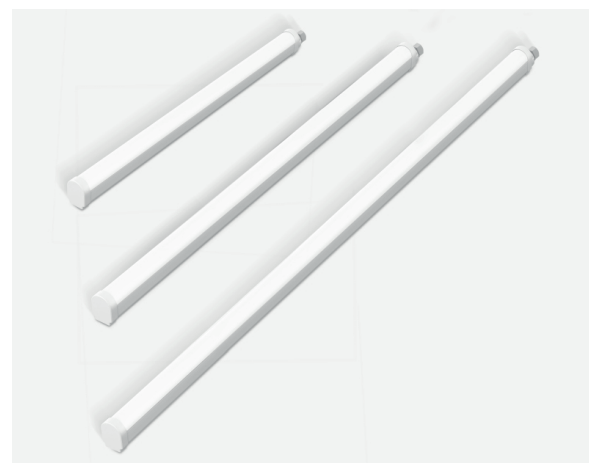

eco-budget



Product Description / Description SlimLine36

- EN**
- Body: PC Extrusion Molding
 - PC Material: could meet IK08 and 750 GWT requirement
 - Other characteristics, low power consumption, high luminous efficiency, IP65
 - High-low impact, high humidity environmental testing
 - Easy & Fast installation with clips
 - High Lighting Output efficacy 140 Lm/W (also 170 Lumen/W available)
- FR**
- Corps : Moulage par extrusion de polycarbonate
 - Matériau PC : Conforme aux normes IK08 et 750 GWT
 - Autres caractéristiques : Faible consommation d'énergie, efficacité lumineuse élevée, IP65
 - Résistance aux chocs et à l'humidité élevée
 - Installation facile et rapide grâce aux clips
 - Efficacité lumineuse élevée : 140 lm/W (170 lm/W également disponible)

RESIDENTIAL APPLICATIONS

